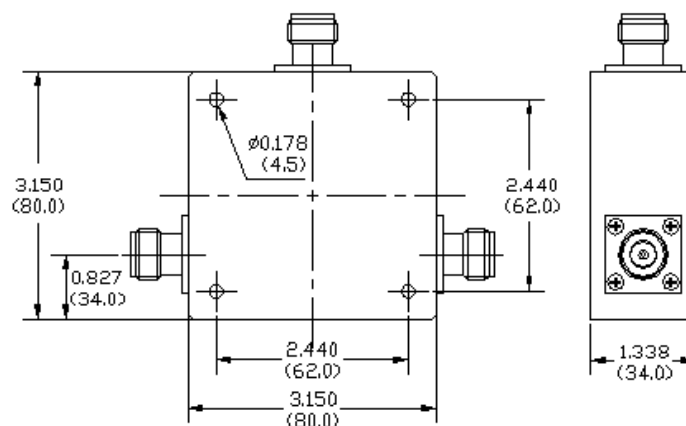


Key Features:

- Center frequency range: 150~400MHz, 3~ 20% bandwidth
- N-Type (default) , TNC or SMA Connectors
- Good magnetic filed shielding
- Customer can specify center frequency and bandwidth
- Weight ~1.2kg (2.6 lbs)

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	FWD CW Power, Watts	FWD Peak Power, kW	Temp. Range, °C
F2518-0182-08	175~190	0.6Max	20.0	1.25	150		-10 ~ +60
F2518-0189-03	186~192	0.6Max	20.0	1.25	200		-10 ~ +60
F2518-0200-20	180~220	0.6Max	17.0	1.30	150		-10 ~ +50
F2518-0200-10	190~210	0.6Max	18.0	1.30	150	5.0	-10 ~ +50
F2518-0210-09	200~220	0.6Max	18.0	1.30	150		-10 ~ +50
F2518-0233-15	216~250	0.8Max	18.0	1.30	150		-10 ~ +50
F2518-0250-08	240~260	0.5Max	18.0	1.30	300		-10 ~ +50
F2518-0245-20	220~270	0.8Max	18.0	1.35	150		-10 ~ +50
F2518-0250-16	230~270	0.8Max	18.0	1.30	150		-10 ~ +50
F2518-0275-07	265~285	0.6Max	18.0	1.25	150		-55 ~ +85
F2518-0280-07	270~290	0.6Max	18.0	1.25	150		-55 ~ +85
F2518-0295-10	280~310	0.6Max	18.0	1.25	150		-55 ~ +85
F2518-0305-08	292~318	0.6Max	18.0	1.25	150		-55 ~ +85
F2518-0350-08	335~365	0.6Max	18.0	1.25	150		-66 ~ +85
F2518-0380-08	365~395	0.6Max	18.0	1.25	150		-66 ~ +85
F2518-0390-05	380~400	0.5Max	20.0	1.25	200		-10 ~ +65

Mechanical Structure:**Ordering Information:**

F2518-XXXX-XX
 ↓
 Bandwidth, XX%,
 ↓
 Frequency 0XXX MHz,