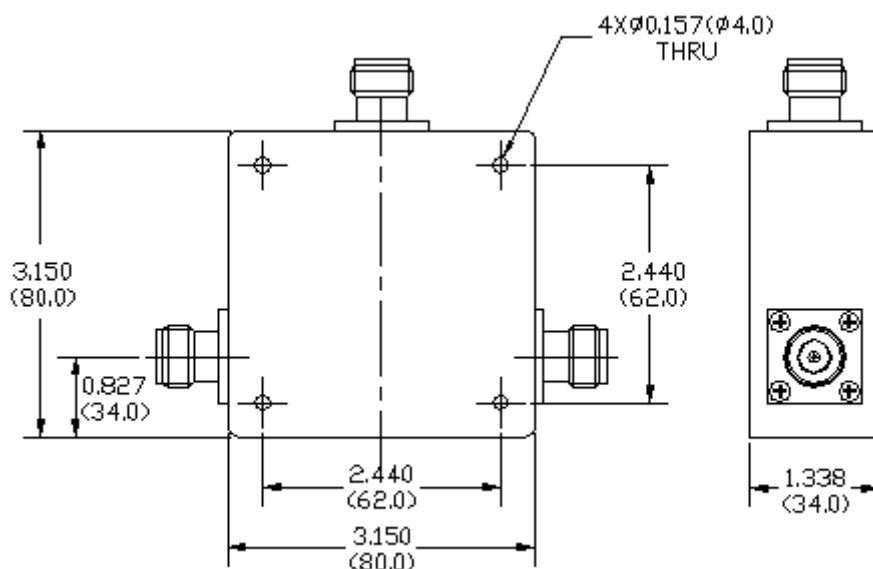


Key Features:

- Wide frequency bandwidth,
- N-Type or SMA female Connectors,
- low insertion loss, good reverse isolation
- High power handling capability
- Weight ~990 grams(35 oz)

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2519-0262-29-N10	225~300	0.6 Max	18	1.35	250	0 ~ +85
F2519-0280-29-N10	240~320	0.5 Max	18	1.35	250	0 ~ +85
F2519-0280-29-S01	240~320	0.5 Max	20	1.25	50	-40 ~ +85

Mechanical Structure:**Ordering Information:**

F2519-XXXX-XX
 ↓ ↓
 Frequency 0XXX MHz, Bandwidth, XX%,