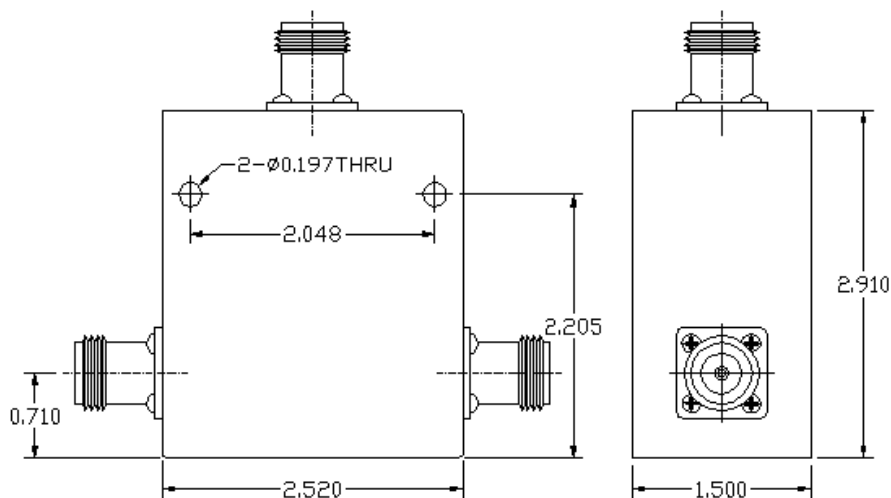


Key Features:

- Frequency range: 400~1200MHz, bandwidth up to 32%
- N-Type female Connectors
- Small size, low cost
- Power handling +200Watts CW, +3000Watt Peak
- Weight 1lb13.0oz (822 grams)
- Clockwise circulation direction, customer can specify if otherwise

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts CW/Peak	Temp. Range, °C
F2529-0425-12	400~450	0.5 Max	≥ 20	≤1.2	250/3000	-25 ~ +70
F2529-0435-07	420~450	0.5 Max	≥ 20	≤1.2	250/3000	-25 ~ +70
F2529-0435-08	417~453	0.5 Max	≥ 20	≤1.2	250/3000	-25 ~ +70
F2529-0435-14	405~4865	0.6 Max	≥ 19	≤1.25	200/3000	-25 ~ +70
F2529-0475-04	465~485	0.5 Max	≥ 20	≤1.2	200/3000	-25 ~ +70
F2529-0750-32	630~870	0.5 Max	≥ 19	≤1.25	200/3000	-25 ~ +70
F2529-1060-11	1000~1120	0.4 Max	≥ 20	≤1.2	200/3000	-40 ~ +70
F2529-1500-07	1450~1550	0.4 Max	≥ 20	≤1.2	200/3000	-40 ~ +70

Mechanical Structure:**Ordering Information:**

Note: All units are in inches.

F2529-XXXX-XX
 ↓
 Bandwidth, XX%,
 ↓
 Frequency X.XXX GHz,