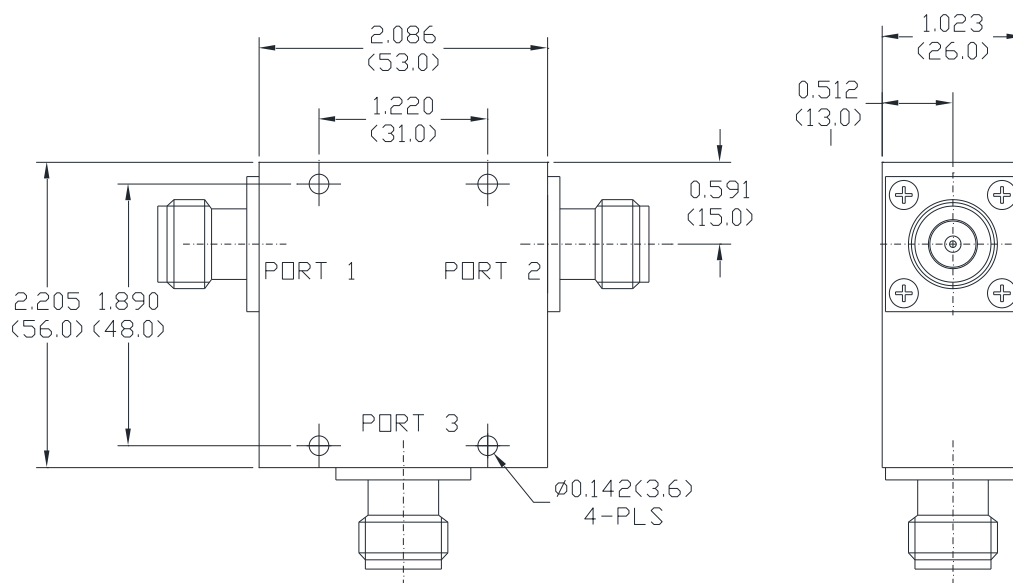


Key Features:

- Frequency range: 350~500MHz
- 50 ohm type N female or SMA female connectors
- Operating temperature -20~+60°C
- Customer can specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2545-0425-35	350-500	0.6 Max	≥ 16	≤ 1.40	100	-20 ~ +60
F2545-0450-31	380-520	0.6 Max	≥ 17	≤ 1.40	100	-20 ~ +60

Mechanical Structure:

All units are in inches (mm)

Ordering Information:

F2545-XXXX-XX

Bandwidth, XX%,

Center Frequency X.XXX GHz

Note: All units in inches (mm).