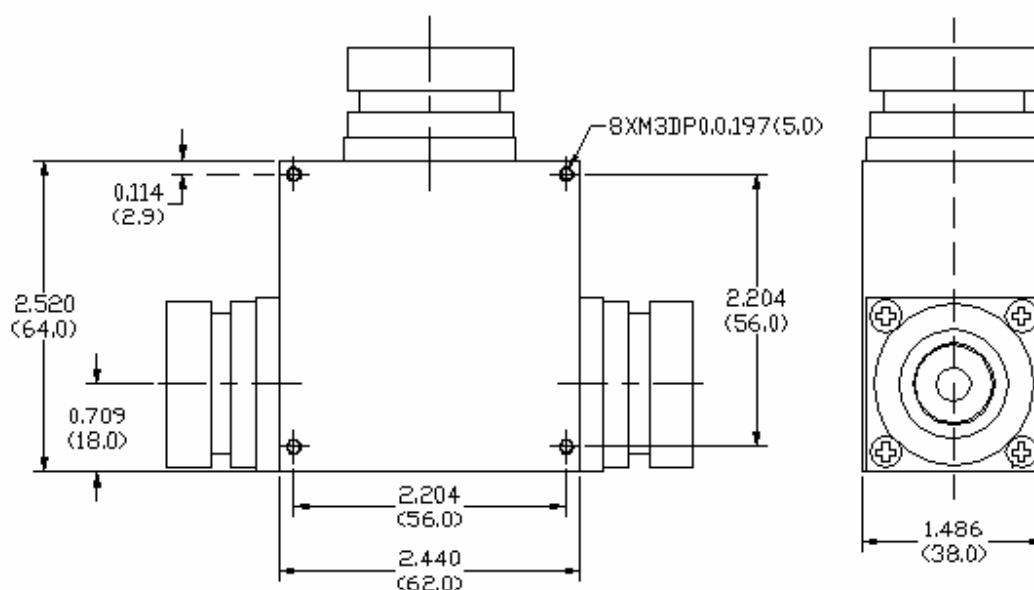


**Key Features:**

- Frequency range: 0.96~1.22MHz
- DIN 7/16 female connectors
- Small size, low cost
- Power handling >+160Watts CW, 4kWatts pulse
- Operating temperature -30~+65°C
- Customer specify other center frequency and bandwidth
- 

**Electrical Specifications**

| Part No.      | Freq Range GHz | Insertion Loss, dB | Reverse Isolation, dB | VSWR | Power CW, Watts | Power Pulse, kWatts | Temp. Range, °C |
|---------------|----------------|--------------------|-----------------------|------|-----------------|---------------------|-----------------|
| F2560-0109-24 | 0.96-1.22      | 0.5 Max            | ≥ 20                  | ≤1.2 | ≥ 160           | ≥5                  | -30 ~ +65       |

**Mechanical Structure:**

Note: All units in inches(mm).

**Ordering Information:**

F2560-XXXX-XX  
          ↓          ↓  
          Bandwidth, XX%,  
          Center Frequency XX.XX GHz