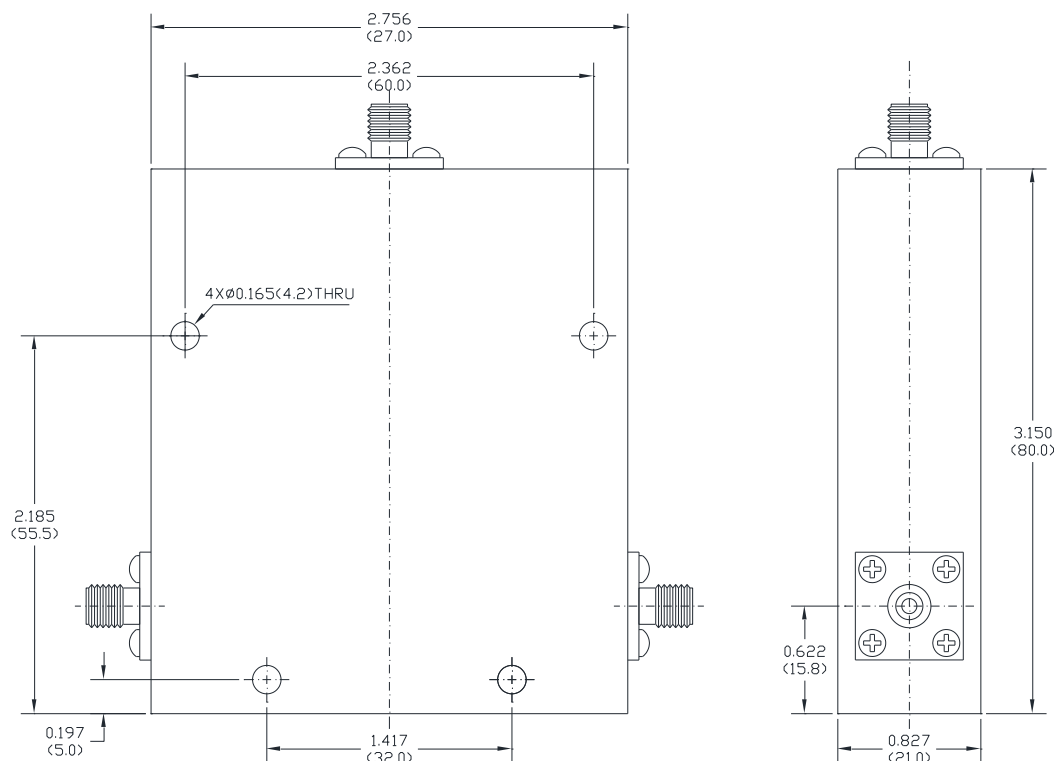


Key Features:

- Wide frequency range: 1000~2000MHz partial or full band
- 50 ohm N-type or SMA female connector In/out
- Power handling +100 Watts forward and Reverse
- Operating temperature 0~+45°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2573-0150-67	1.0~2.0	0.7 Max	≥ 15	≤ 1.40:1	≥ 100	0 ~ +45

Mechanical Structure:

Note: All units in inches (mm).

Ordering Information:

F2572-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,