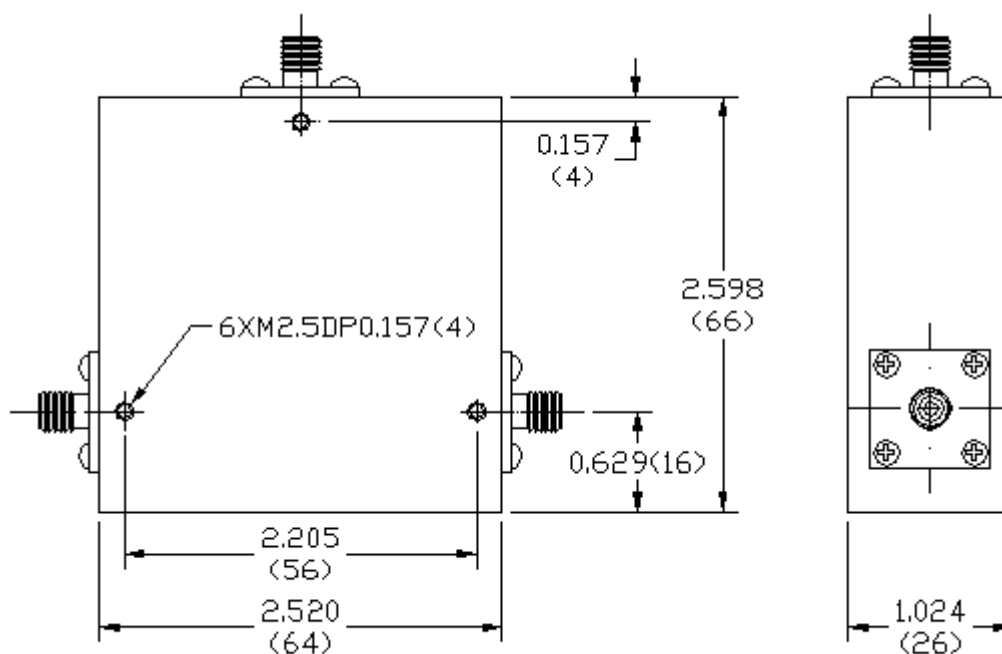


Key Features:

- Octave band operation
- 50 Ohm SMA connector In/out
- Small size, low cost
- Customer specify center frequency and bandwidth for narrower bandwidth operation

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward CW/Pulse Power, Watts	Temp. Range, °C
F2575-0150-67	1.0~2.0	0.6 Max	≥ 16	≤ 1.5	25/500	+10 ~ +50
F2575-0165-67	1.1~2.2	0.7 Max	≥ 16	≤ 1.4	10.0	0 ~ +50

Mechanical Structure:

Note: All units in inches (mm).

Ordering Information:

F2575-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,