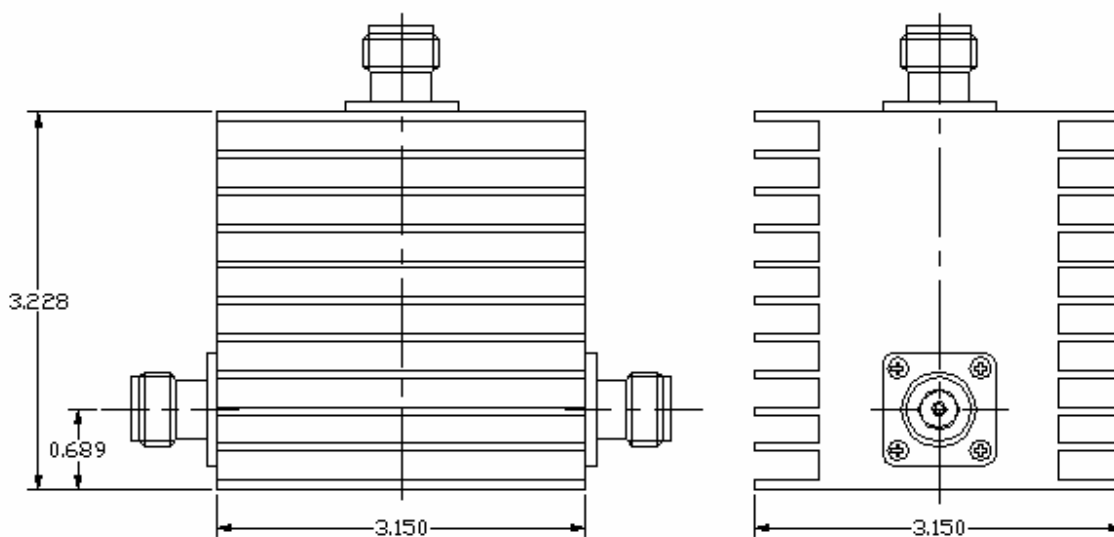


Key Features:

- Frequency range: 1.0~1.6GHz, 200MHz bandwidth
- Low insertion loss and good VSWR
- Power handling up to 500Watts CW, 2000Watts peak pulse power
- Input/output 50 ohm N-female or male connectors
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB Max	Reverse Iso., dB Min	VSWR Max.	Forward Power, Watts	Pulse Power Watts	Temp. Range, °C
F2578-0106-11	1000-1120	0.4	20	≤1.30	≥ 500	>2kW	0 ~ +50
F2578-0120-17	1100-1300	0.35	25	≤1.25	≥ 500	>2kW	0 ~ +50
F2578-0125-10	1185~1315	0.35	25	≤1.25	≥ 500	>2kW	0 ~ +50
F2578-0130-15	1200-1400	0.35	25	≤1.25	≥ 500	>2kW	0 ~ +50

Mechanical Structure:

Note: All units are in inches.

Ordering Information:

F2578-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,