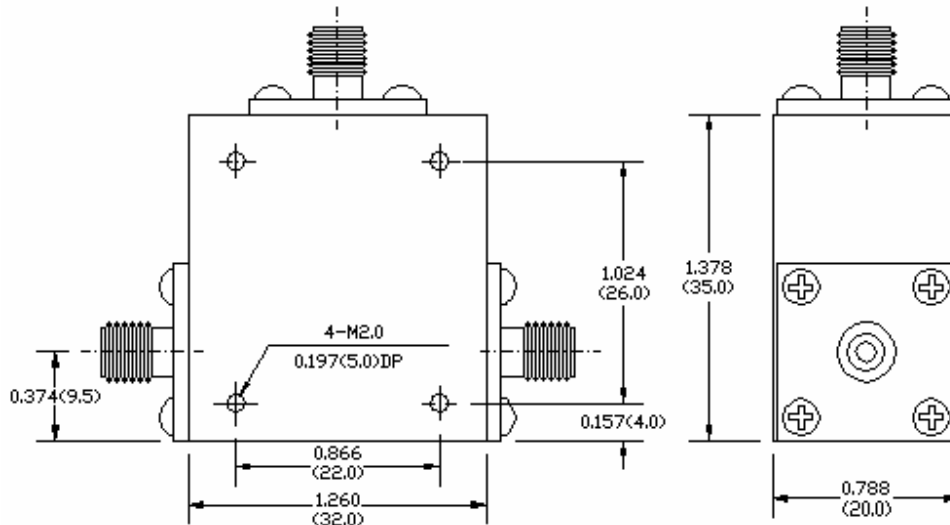


Key Features:

- Frequency range: 1700~2700MHz
- SMA connectorized configuration
- Small size, low cost
- Power handling >+40Watts forward
- Operating temperature -40~+70°C
- Weight 3.9 oz (110 grams)
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB Typ/Max	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2588-0194-24	1710-2170	0.3/0.5	≥ 20	≤1.2	≥ 40	-40 ~ +70
F2588-0200-10	1900~2100	0.2/0.5	≥ 20	≤1.2	≥ 40	-40 ~ +70
F2588-0235-13	2200~2500	0.3/0.5	≥ 20	≤1.2	≥ 40	-40 ~ +70
F2588-0240-08	2300~2500	0.2/0.5	≥ 20	≤1.2	≥ 40	-40 ~ +70
F2588-0250-08	2400~2600	0.2/0.5	≥ 20	≤1.2	≥ 40	-40 ~ +70
F2588-0260-08	2500~2700	0.2/0.5	≥ 23	≤1.2	≥ 40	-20 ~ +60

Mechanical Structure:

Note: All units are in inches.

Ordering Information:

F2588-XXXX-XX
 ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,