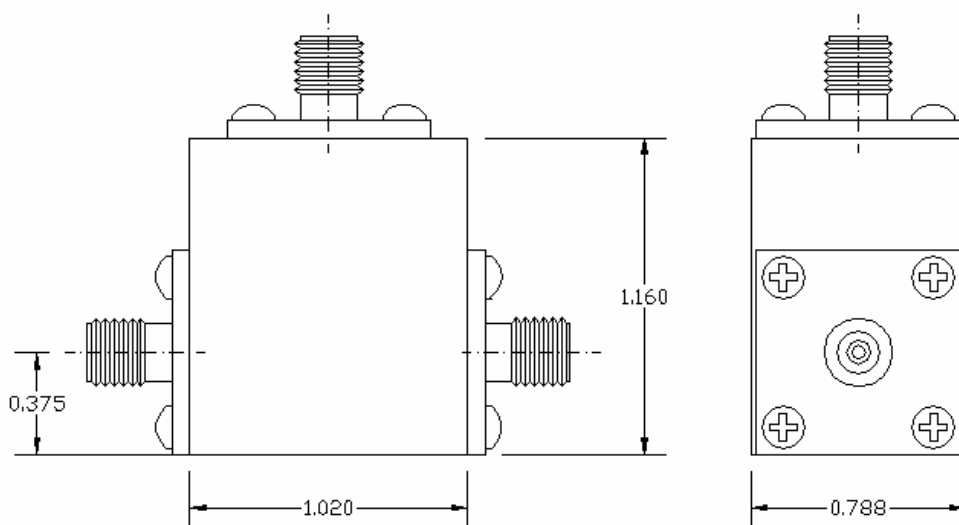


Key Features:

- Frequency range: 2500~4000MHz
- SMA or N connector, female or male, default SMA-F
- Small size, low cost
- Power handling >+25Watts forward
- Operating temperature -30~+60°C
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB Typ/Max	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2602-0290-07	2.8~3.0	0.3/0.5	≥ 20	≤1.2	25	-30 ~ +60
F2602-0300-07	2.9~3.1	0.3/0.5	≥ 20	≤1.2	25	-30 ~ +60
F2602-0310-06	3.0~3.2	0.3/0.5	≥ 20	≤1.2	25	-30 ~ +60
F2602-0330-12	3.1~3.5	0.3/0.5	≥ 20	≤1.2	25	-30 ~ +60
F2602-0355-14	3.3~3.8	0.3/0.5	≥ 20	≤1.25	25	-30 ~ +60
F2602-0360-06	3.5~3.7	0.3/0.5	≥ 20	≤1.2	25	-30 ~ +60
F2602-0370-01	3.68~3.72	0.3 Max	≥ 23	≤1.15	25	-30 ~ +60

Mechanical Structure:

Note: All units are in inches.

Ordering Information:

F2602-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,