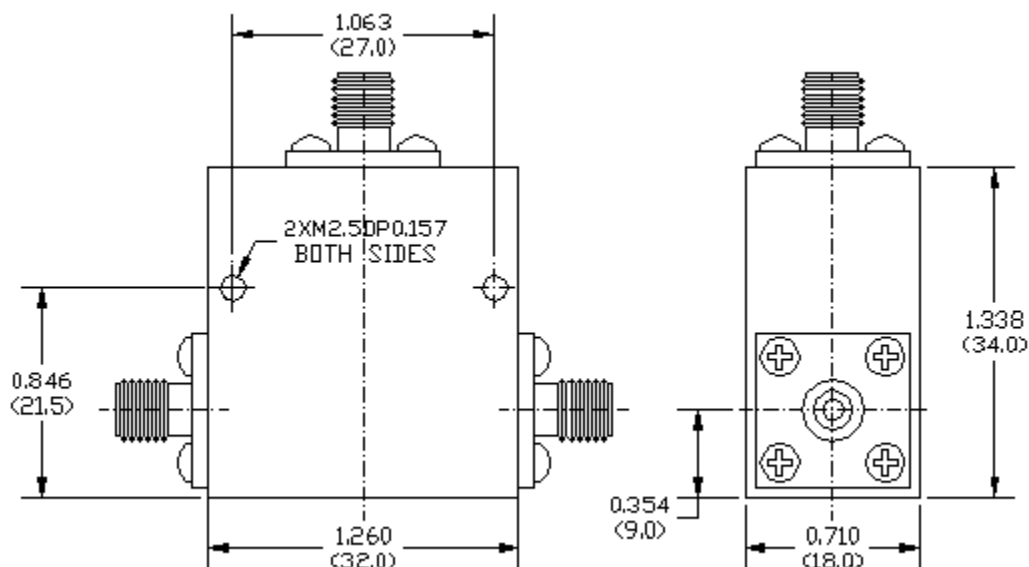


Key Features:

- Wide frequency range: 2000-4000MHz partial or full band
- 50 ohm SMA coaxial connectors
- High power handling +100 Watts forward,
- Operating temperature -10~+50°C

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2614-0300-67	2.00-4.00	0.6 Max	≥ 16	≤ 1.4	100	-10 ~ +50

Mechanical Structure:

Note: All units in inches (mm).

Ordering Information:

F2614-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,