

Key Features:


- Frequency range: 7.0~18GHz
- SMA connectorized configuration
- Small size, low cost
- Power handling +5 Watts
- Customer specify center frequency and bandwidth



Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2670-0745-07	7.2-7.7	0.5 Max	≥ 23	≤ 1.2	≥ 5	-25 ~ +55
F2670-0745-10	7.1-7.8	0.5 Max	≥ 20	≤ 1.2	≥ 5	-40 ~ +70
F2670-0750-13	7.0~8.0	0.5 Max	≥ 20	≤ 1.2	≥ 5	-25 ~ +55
F2670-0920-04	9.0-9.4	0.5 Max	≥ 23	≤ 1.2	≥ 5	-25 ~ +55
F2670-0960-08	9.1-10.0	0.5 Max	≥ 20	≤ 1.2	≥ 5	-25 ~ +55
F2670-1095-05	10.7-11.2	0.5 Max	≥ 23	≤ 1.2	≥ 5	-25 ~ +55
F2670-1300-08	12.5-13.5	0.5 Max	≥ 23	≤ 1.2	≥ 5	-25 ~ +55
F2670-1400-14	13.0-15.0	0.7 Max	≥ 18	≤ 1.3	≥ 5	-25 ~ +55
F2670-1400-07	13.5-14.5	0.5 Max	≥ 23	≤ 1.2	≥ 5	-25 ~ +55
F2670-1450-07	14.0-15.0	0.5 Max	≥ 23	≤ 1.2	≥ 5	-25 ~ +55
F2670-1550-13	14.5-16.5	0.5 Max	≥ 20	≤ 1.2	≥ 5	-25 ~ +55
F2670-1750-06	17.0-18.0	0.5 Max	≥ 23	≤ 1.2	≥ 5	-25 ~ +55

Mechanical Structure:

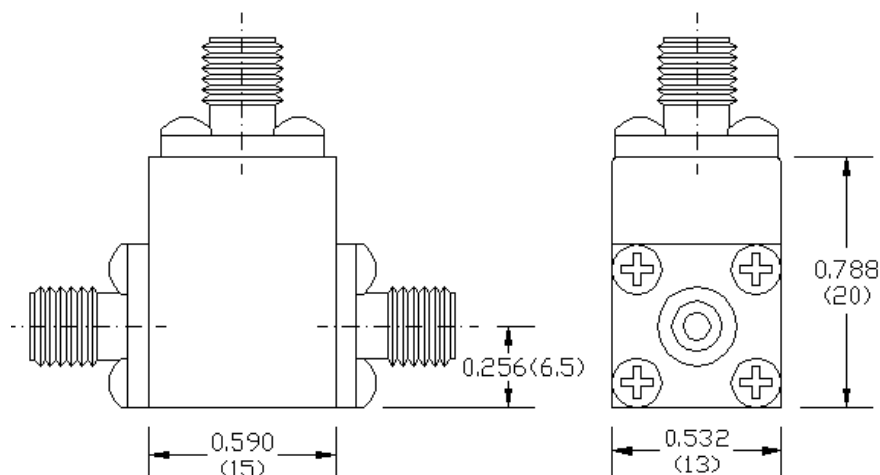

Note: All units in inches (mm).

Ordering Information:

F2670-XXXX-XX
 ↓
 Bandwidth, XX%
 ↓
 Frequency XX.XX GHz