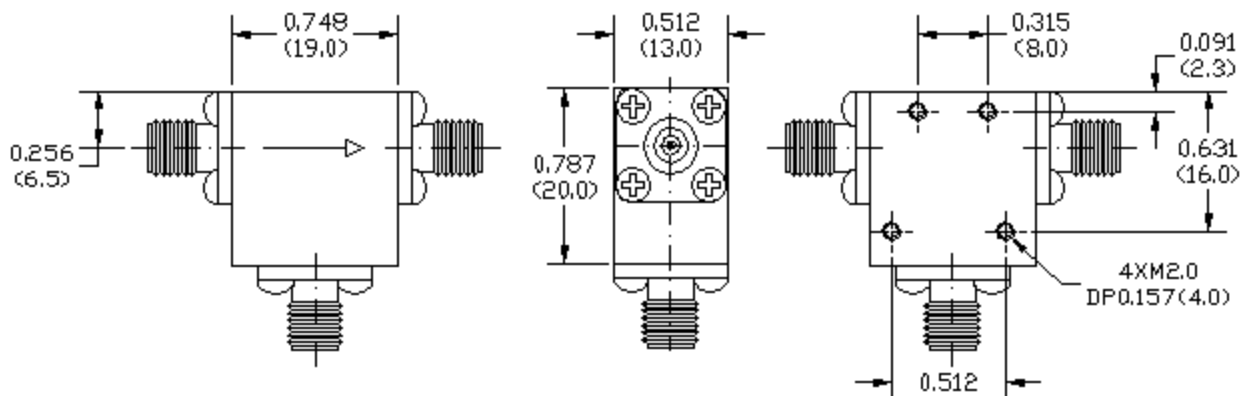


Key Features:

- Full band frequency operation band from 6.0 to 18.0GHz
- SMA female connector RF I/O
- Clockwise signal circulation direction (counter clockwise circulation upon request)
- Small size, low cost
- Power handling +10 Watts maximum forward
- Weight ~1 oz (~28 grams)
- Operating temperature -40~+70°C

**Electrical Specifications**

Part Number	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2700-1200-A0	6.0-18.0	1.5 Max	≥ 10	≤ 1.9	≥ 10	-40 ~ +70

Mechanical Structure:

Note: All units in inches (mm)

Ordering Information:

F2700-XXXX-XX
 ↓
 Bandwidth, XX%,
 ↓
 Frequency XX.XX GHz,