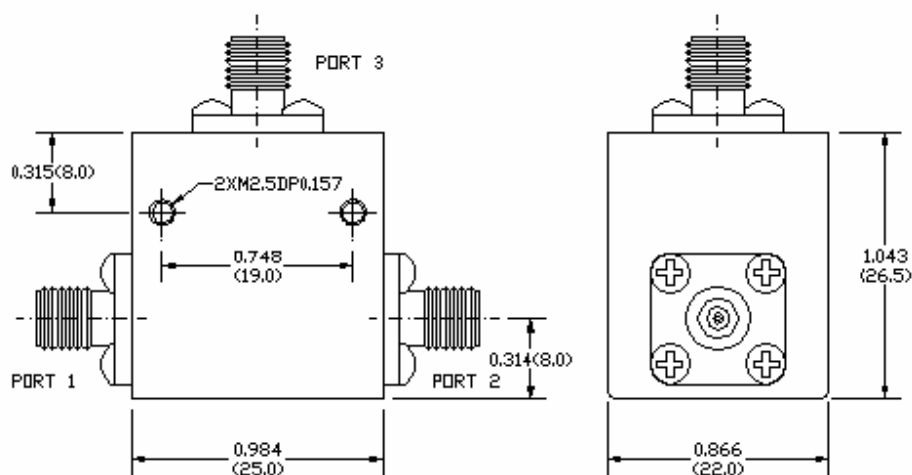


Key Features:

- Frequency range: 8.0~18GHz, bandwidth up to 15%
- SMA connectorized configuration
- Small size, low cost
- Power handling +30 Watts CW
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2716-0975-15	9.0-10.5	0.7 Max	≥ 18	≤ 1.3	≥ 30	-25 ~ +65
F2716-1095-05	10.7-11.2	0.5 Max	≥ 23	≤ 1.2	≥ 30	-25 ~ +65
F2716-1300-08	12.5-13.5	0.5 Max	≥ 23	≤ 1.2	≥ 30	-25 ~ +65
F2716-1400-14	13.0-15.0	0.7 Max	≥ 18	≤ 1.3	≥ 30	-25 ~ +65
F2716-1400-07	13.5-14.5	0.5 Max	≥ 23	≤ 1.2	≥ 30	-25 ~ +65
F2716-1450-07	14.0-15.0	0.5 Max	≥ 23	≤ 1.2	≥ 30	-25 ~ +65
F2716-1500-05	14.6~15.4	0.5 Max	≥ 20	≤ 1.2	≥ 30	-25 ~ +65
F2716-1675-15	15.5~18.0	0.6 Max	≥ 20	≤ 1.2	≥ 30	-25 ~ +65

Mechanical Structure:

Note: All units in inches(mm).

Ordering Information:

F2716-XXXX-XX
 ↓ ↓
 Frequency XX.XX GHz Bandwidth, XX%