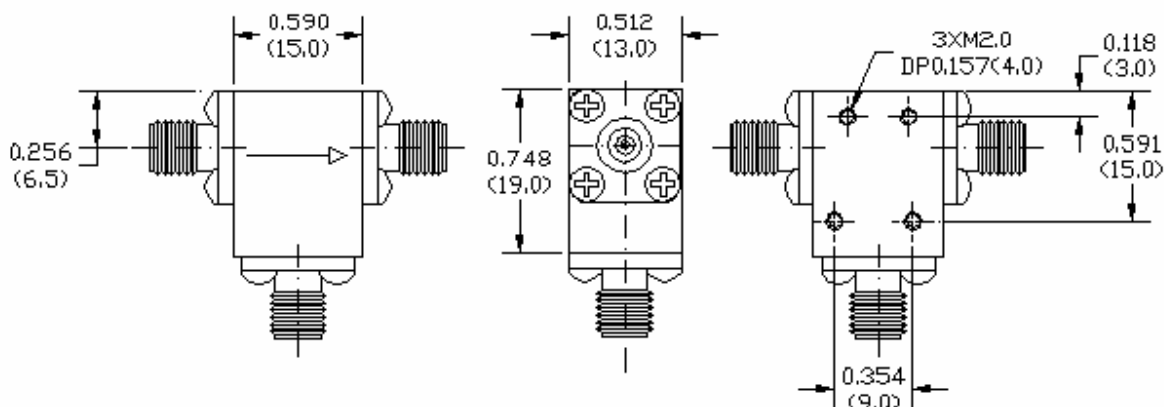


Key Features:

- Wide frequency range: 12.0-18.0GHz full band
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts maximum forward
- Operating temperature -40~+70°C
- Circulation direction is clockwise in default, customer can specify otherwise

Electrical Specifications

Part Number	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2720-1500-40	12.0-18.0	0.6 Max	≥ 18	≤ 1.35	≥ 10	-40 ~ +80

Mechanical Structure:

Note: All units in inches (mm)

Ordering Information:

F2720-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz, 1