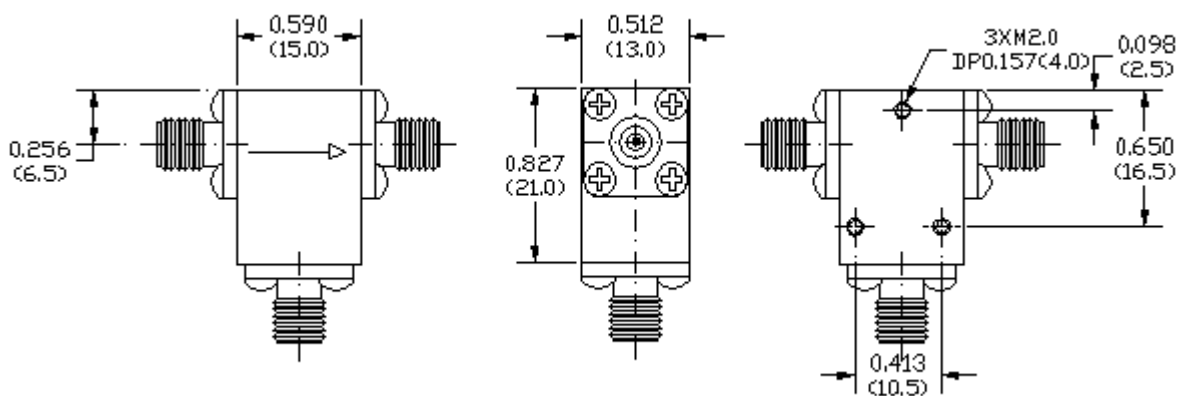


Key Features:

- Wide frequency range: 8.0-18.0GHz full band
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts maximum forward
- Operating temperature -40~+70°C

Electrical Specifications

Part Number	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2740-1300-77	8.0-18.0	0.8 Max	≥ 15	≤ 1.5	≥ 10	-40 ~ +70

Mechanical Structure:

Note: All units in inches(mm)

Ordering Information:

F2740-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,