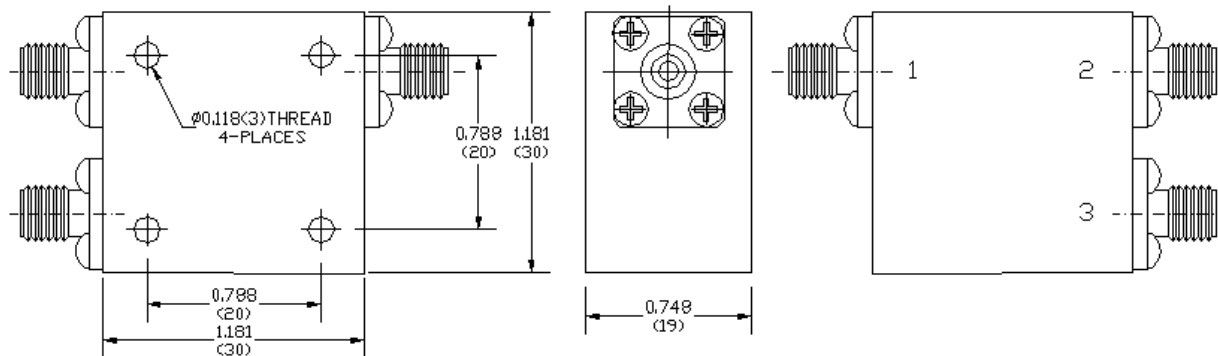


Key Features:

- Frequency range: 250~600MHz, > 8% bandwidth
- SMA connectorized configuration
- Small size, low cost
- Power handling +10 Watts
- Operating temperature -10~+55°C
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F2840-0303-08	290-315	0.8 Max	≥ 18	≤ 1.3	≥ 10	-10 ~ +55
F2840-0400-08	385~415	0.8 Max	≥ 18	≤ 1.3	≥ 10	-10 ~ +55
F2840-0500-08	480~520	0.8 Max	≥ 18	≤ 1.3	≥ 10	-10 ~ +55
F2840-0570-07	550-590	0.8 Max	≥ 18	≤ 1.3	≥ 10	-10 ~ +55

Mechanical Structure:**Ordering Information:**

Note: All units in inches(mm).

F2840-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency 0XXX MHz,