

Key Features:

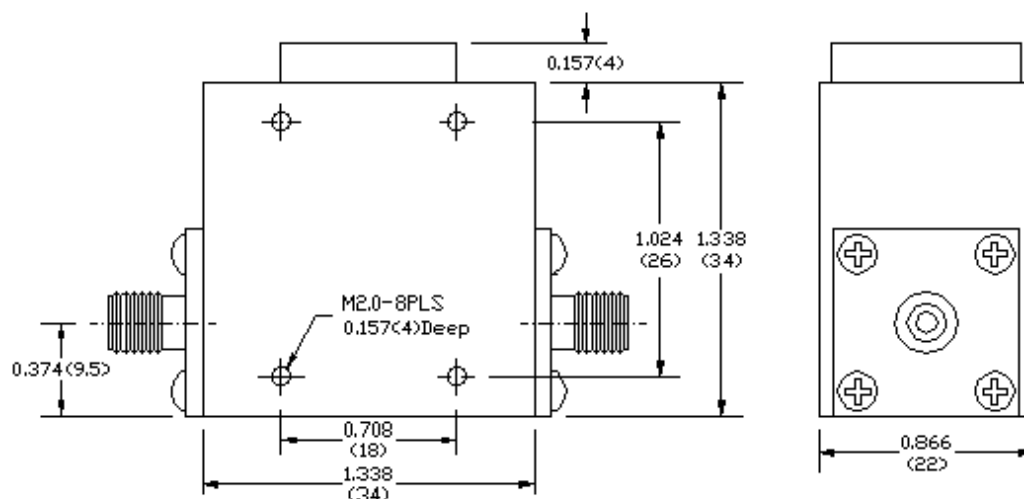
- Frequency range: 800~2200MHz
- SMA connectorized configuration (N type optional)
- Small size, low cost
- Power handling >50Watts CW forward
- Peak Power 800 Watts at DC 2% maxim
- Weight 5 oz (141 grams)
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Iso., dB	VSWR	FWD Power, Watt CW/Peak	Reverse Power, Watts CW/Peak	Temp. Range, °C
F2066-0110-18	1000~1200	0.5 Max	≥ 20	≤1.2	50/800	10/160	-10 ~ +70
F2066-0195-26	1700~2200	0.5 Max	≥ 18	≤1.3	50/400	10/160	-10 ~ +70

Ordering Information:

F2066-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,

Mechanical Structure:

Note: All units are in inches
(mm)