

Key Features:


- Wide operating frequency range from 1000 to 2000MHz
- 0.6dB typical insertion loss and 17dB typical reverse isolation
- 50 ohm N-type coaxial connectors
- 50 Watts CW forward power handling, 10 Watts reverse power termination
- 0~+45°C operating temperature range
- Weight 700grams(24.6oz)

**Description:**

F2072-0150-67N is a single junction coaxial isolator with N-female coaxial connectors operating in the frequency range from 1.0GHz to 2.0GHz and offers 0.6dB typical insertion loss and 17dB typical reverse isolation. The coaxial isolator can handle 50 watts of forward CW power and 10 watts of reverse power.





Electrical Specifications

No.	Parameters	Units	Specifications		
			Minimum	Typical	Maximum
1	Frequency Range	GHz	1.0		2.0
2	Insertion Loss	dB	-	0.6	1.0
3	Reverse Isolation	dB	15.0	17.0	-
4	VSWR	-	-	-	1.5:1
5	Forward Power CW	Watts			50
6	Reverse Power CW	Watts			10
7	Operating Temperature	°C	0		+45
8	Impedance	Ω		50	
9	RF Connectors	-	Type N Female		
10	Signal Flow Direction	-	From Port 1 to Port 2		

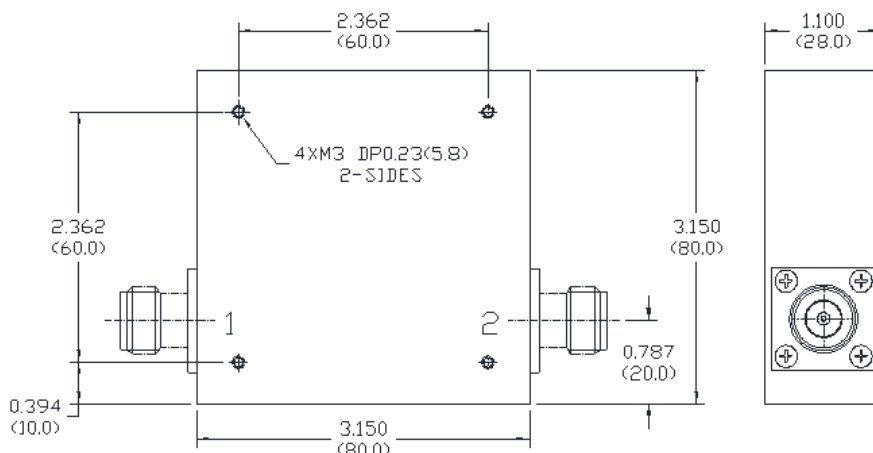Mechanical Structure:

Note: All units in inches (mm).

Typical Test Plots:

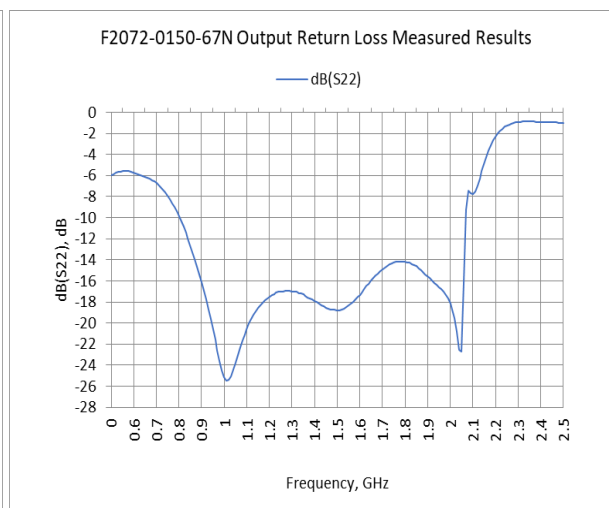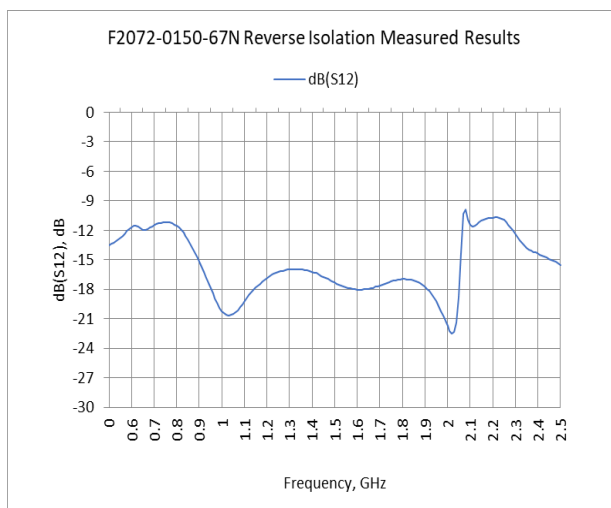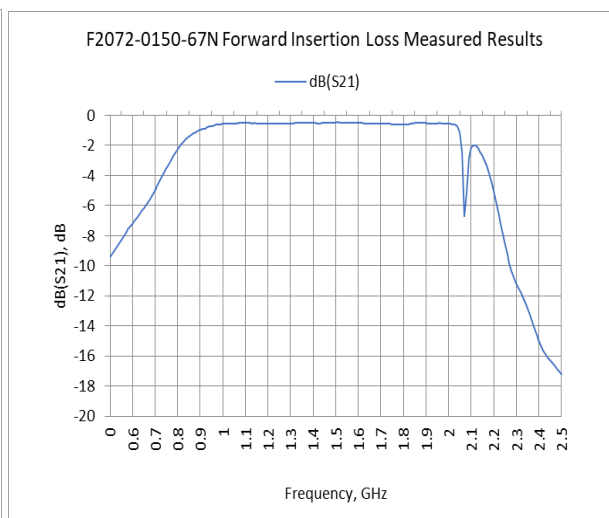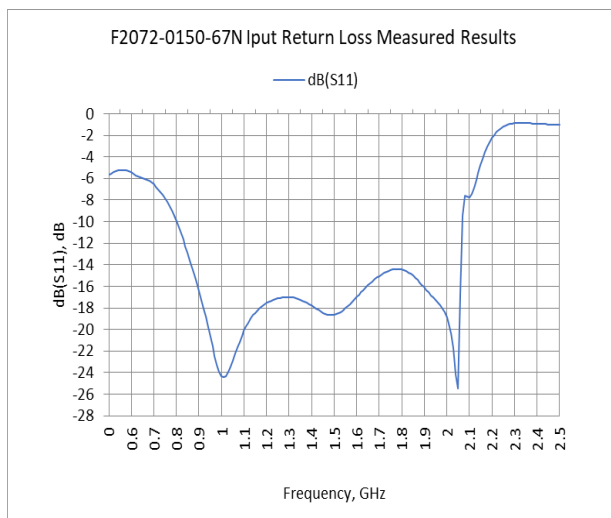

Revision History:

Revision	Date	Description	Comments
A00	07/30/2020	Initial Release	