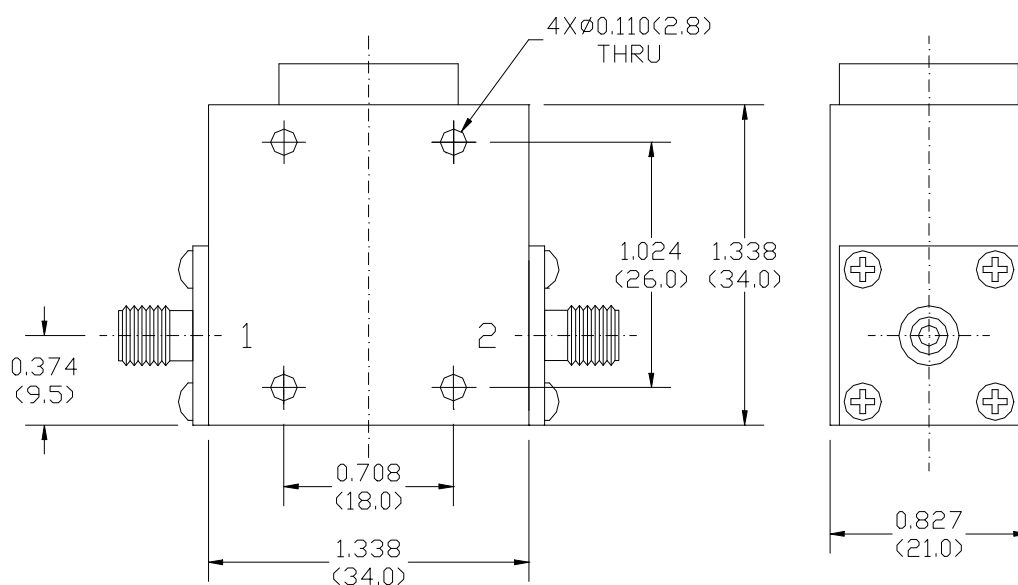


Key Features:

- Frequency range: 1250~1850MHz full band
- SMA connectorized configuration,
- Small size, low cost
- Power handling 20Watts forward, 20 Watt Reverse
- Operating temperature -35~+85°C
- Default circulation direction is clockwise, customer can specify otherwise

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power, Watts	Temp. Range, °C
F2080-0155-39	1250-1850	≤0.5	≥ 17	≤1.4	≥ 20	≥ 20	-35 ~ +85

Mechanical Structure:

Note: All units are in inches (mm).

Ordering Information:

F2080-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,