

Key Features:

- Wide operating frequency range from 4.0 to 8.0GHz
- 0.6dB typical insertion loss and 17dB typical reverse isolation
- 50 ohm SMA female coaxial connectors
- 30 Watts CW forward power handling, 10 Watts reverse power termination
- -40~+75°C operating temperature range
- Weight 26.5 grams (0.94oz)

**Description:**

F2158-0600-67 is a single junction coaxial isolator with SMA female coaxial connectors operating in the frequency range from 4.0GHz to 8.0GHz and offers 0.6dB maximum insertion loss and 18dB minimum reverse isolation. The coaxial isolator can handle 30 watts of forward CW power and 10 watts of reverse termination power.


Electrical Specifications

No.	Parameters	Units	Specifications		
			Minimum	Typical	Maximum
1	Frequency Range	GHz	4.0		8.0
2	Insertion Loss @ Room temp.	dB	-		0.5
3	Reverse Isolation @ room temp.	dB	18.0		
4	VSWR @ room temp.	-	-	-	1.30:1
5	Forward Power CW	Watts			30
6	Reverse Power CW	Watts			10
7	RF Connectors	-	50 Ohm SMA Female		
8	Signal Flow Direction	-	From Port 1 to Port 2		

Materials, Environmental & Mechanical Specifications


No.	Parameters	Specifications
1	Isolator Body	Aluminum
2	Magnetic Shunt/Shield	Steel, nickel plated
3	Connector Body	Brass, gold plated
4	Connector Center Contact	Beryllium Copper, gold plated
5	Insulator	PTFE(Teflon)
6	Operating Temperature	-20 to +65 °C
7	Survive Temperature	-55 to +125 °C
9	Outline Dimensions	0.748×0.748×0.512 inches ³ (19.0×19.0×13.0 mm ³)
10	Weight	0.94OZ (26.5 grams)
11	RoHS & REACH Compliance	Yes

Mechanical Structure:

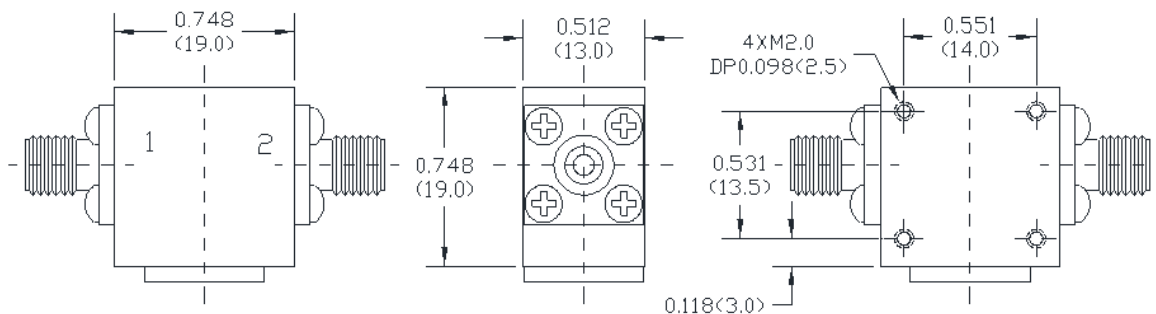

Typical Test Plots:

Note: All units in inches (mm).

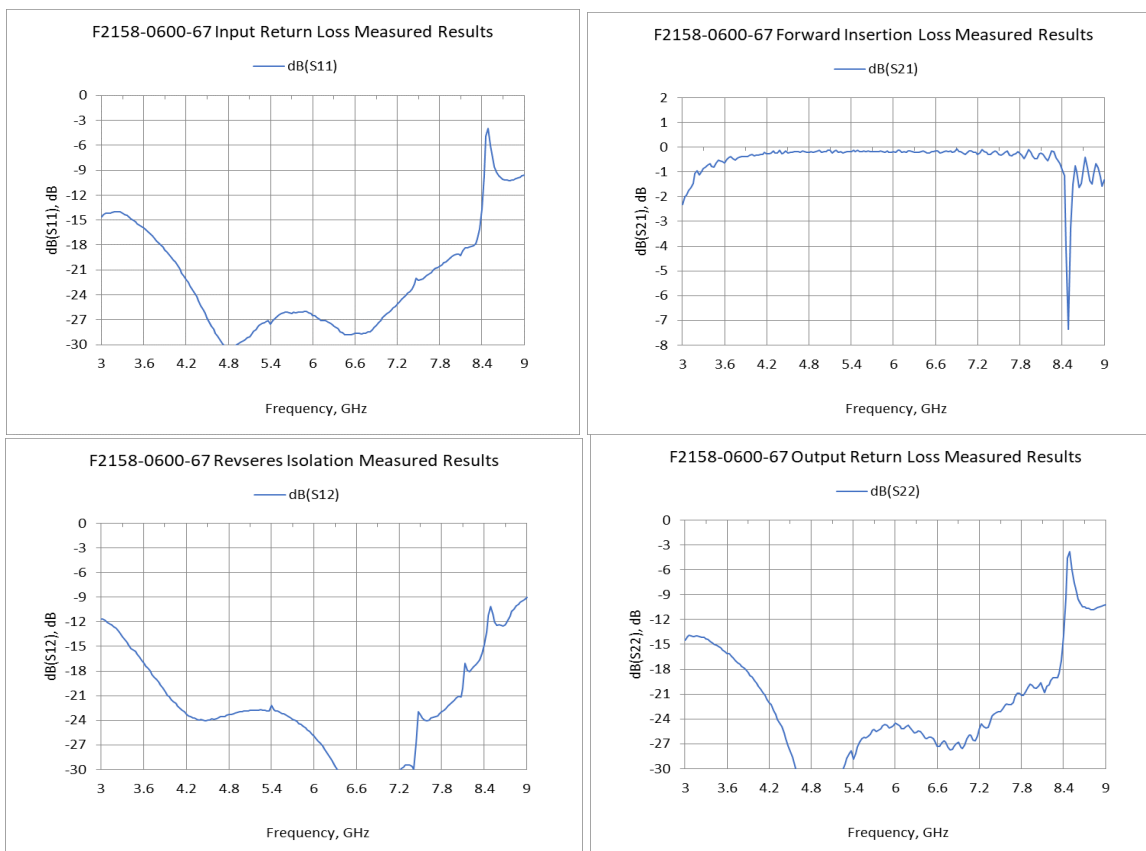

Revision History:

Revision	Date	Description	Comments
A00	06/20/2020	Initial Release	