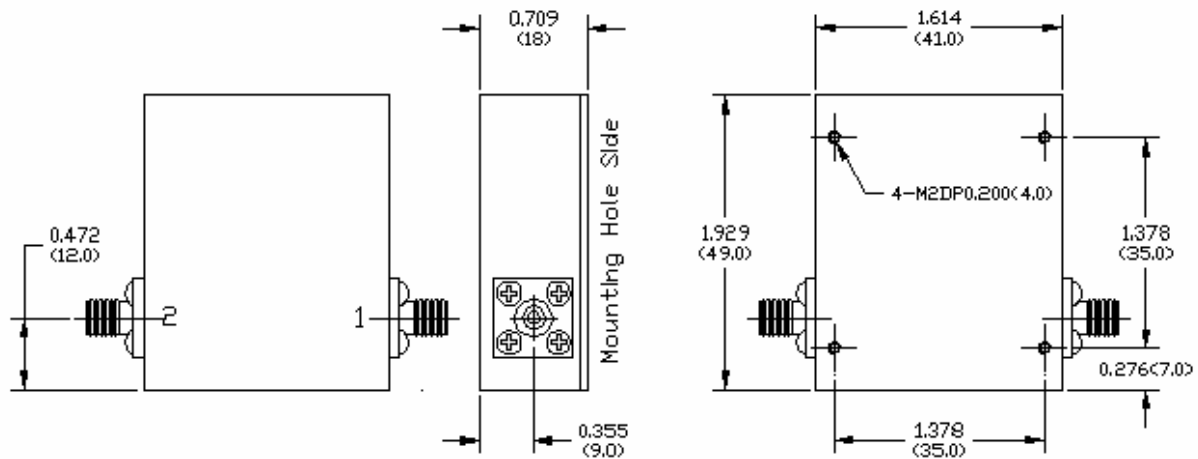


Key Features:

- Frequency range: 470~862MHz, up to full bandwidth
- Small size, low cost
- 50 ohm SMA female I/O
- Power handling +10 Watts CW,
- Operating temperature -40~+70°C
- Customer specify center frequency and bandwidth for narrower bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2332-0540-26	470-610	0.7 Max	≥ 20	≤ 1.25	≥ 10	≥ 1	-40 ~ +70
F2332-0736-34	610~862	0.7 Max	≥ 20	≤ 1.25	≥ 10	≥ 1	-40 ~ +70
F2332-0666-59	470-862	1.2 Max	≥ 15	≤ 1.50	≥ 10	≥ 1	-40 ~ +70

Mechanical Structure:

Note: All units in inches (mm).

Ordering Information:

F2332-XXXX-XX
 ↓ ↓
 Frequency X.XXX GHz Bandwidth, XX%,